



ABRASION RESISTANT



FOOD GRADE




STATIC DISSIPATIVE



TRANSPARENT CONSTRUCTION



WATER

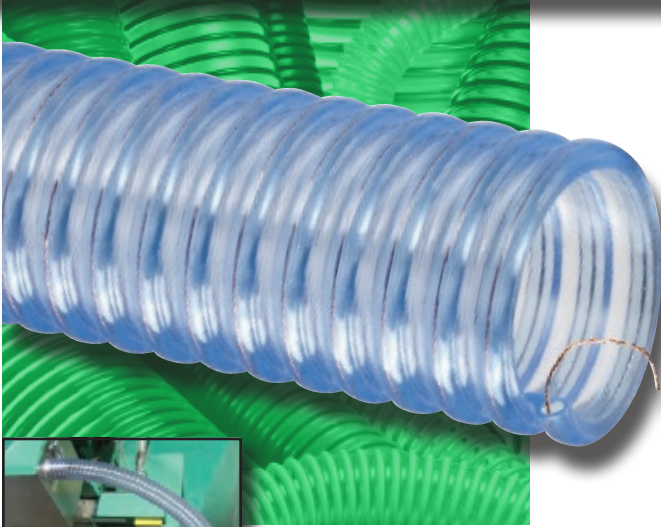

# WE™ Series Food Grade PVC Material Handling Hose With Grounding Wire

NEW LENGTHS & SIZES

### General Applications:

- Food grade material handling – standard duty
- Material handling – standard duty
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment

**Construction:** PVC tube with rigid PVC helix and grounding wire.

**Service Temperature:** -4°F (-20°C) to 150°F (+65°C)\*

### Features and Advantages:

- **Superior Product Design** – Tigerflex™ WE™ series hoses are an industry standard for pneumatic material handling, due to our specially engineered compound, innovative design and uncompromising quality control. Provides the ideal combination of light weight, flexibility and durability.
- **Food Grade Materials** – Hose complies with applicable FDA<sup>(03)</sup> requirements. Hose approved by USDA<sup>(11)</sup> for use in meat and poultry plants.

- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Phthalate Free**

## Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs/ft.)
					68°F	104°F	68°F	104°F			
WE100	1	25.4	1.30	33.0	55	30	28	28	2	100/50	0.21
WE125	1-1/4	32.0	1.65	42.0	50	25	28	28	2	100/60/50	0.33
WE150	1-1/2	38.1	1.93	49.0	50	25	28	28	3	100/60/50	0.43
WE200	2	50.8	2.48	63.0	40	20	28	24	4	100/60/50	0.58
WE225	2-1/4	57.2	2.80	71.0	40	20	28	24	4.5	100/60/50	0.65
WE250	2-1/2	63.5	3.07	76.5	40	20	28	24	5	100/60/50	0.89
WE300	3	76.2	3.64	91.5	40	20	28	24	6	100/60/50	1.25
WE350	3-1/2	88.9	4.27	108.5	35	18	28	24	8	100/60/50	1.55
WE400	4	101.6	4.72	120.0	35	18	24	20	10	100/60/50	1.93
WE500	5	127.0	5.74	146.0	30	15	24	20	16	60/50/20	2.40
WE600	6	152.4	6.81	175.5	30	15	24	20	18	60/50/20	3.70
WE800	8	204.8	9.06	230.0	20	10	20	18	36	20	5.62
WE45M	1.77	45.0	2.20	55.8	45	25	28	24	4	60	0.46
WE57M	2.24	57.0	2.76	70.0	40	20	28	24	4.5	60	0.64
WE60M	2.36	60.0	2.80	71.1	40	20	28	24	4.5	100/50	0.71

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 62.

**\*Actual service temperature range is application dependent.**

**CAUTION:** This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

**BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, PHTHALATE FREE<sup>(09)</sup>, RoHS<sup>(10)</sup>, USDA<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.